

MPM-1000

Large-Diaphragm Condenser Microphone

User Guide

Guía del usuario

Guide d'utilisation

Guida per l'uso

Benutzerhandbuch

Box Contents

Contenido de la caja

Contenu de la boîte

Contenuti della confezione

Lieferumfang



Technical Specifications

Especificaciones técnicas

Spécifications techniques

Specifiche tecniche

Technische Daten

Type	Pure-aluminum-plated, 18mm-diameter-diaphragm capsule condenser microphone
Polar Pattern	Cardioid
Frequency Response	20–20000 Hz
Sensitivity	-38 dB \pm 2 dB (0 dB = 1 V/Pa @ 1 kHz)
Impedance	Output: 200 Ω \pm 30% (@ 1 kHz) Load: \geq 1000 Ω
Self-Noise	17 dBA
Maximum SPL	136 dB (THD α 1%, 1 kHz)
Signal-to-Noise Ratio	77 dB
Power	Requirement: 9–48VDC phantom power Current: 3 mA
Dimensions (length x diameter)	6.5" x 1.90" / 165 x 48 mm
Weight	0.66 lbs. / 0.30 kg


Polar Pattern

Patrón polar

Diagramme polaire

Figura polare

Polardiagramm

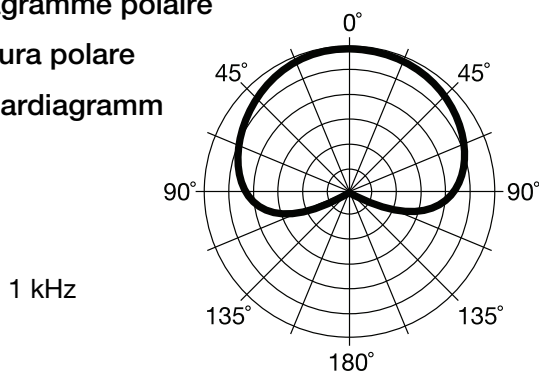

Frequency Response

Respuesta en frecuencia

Réponse en fréquence

Risposta di frequenza

Frequenzgang

